

PEBBELL™ 2 QUICK GUIDE

HOIP

Publication number PEBBELL_2_V4.4_4402.1601
All rights reserved. © HoIP Telecom, 2016

① GETTING TO KNOW YOUR DEVICE



② DEVICE CHARGING


The Pebbell 2 device is equipped with an internal rechargeable battery. The autonomy of the battery may vary depending on the GPS and GSM activity and the use of the device.

- When charging for the first time, please fully charge the battery for around 3~4 hours, using the USB charger or using the docking station to charge. Thus the maximum capacity and lifecycle of the battery is ensured
 - Place the device on the docking station
 - Connect the Micro USB side of the cable to the docking station port and connect the other end of the cable to the designated AC power source (USB/AC adaptor)
 - When charging the RED LED (on docking station) will be blinking (solid). After fully charged, the RED LED WILL be SOLID

Note: A wrong charger may damage the device. Use only the original Pebbell charger. The ideal temperature range for charging is between +10° C and +30° C. The battery life might be shortened if charging the battery below or above those temperatures.

③ SWITCHING THE DEVICE ON

- To turn on the device: Press the side power button for 1 second, all the LEDs will flash rapidly. Device can also be turned on automatically by charging via USB or put into the docking station
- To get an initial location, use outdoors or near a window so the device may fix onto the satellites.

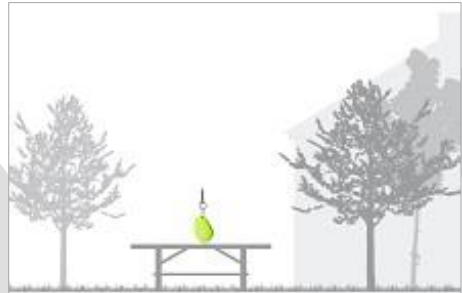

④ SWITCHING THE DEVICE OFF

- To turn off the device: Press and hold the side button and SOS button together for 1 seconds until the LEDs are off

⑤ WHAT DO THE LIGHTS MEAN?

POWER STATUS - LED

LED	Blue ON (solid)	Blue Blinking Quickly	Blue Off or blinking slowly
STATE	The device is charging	Battery power is lower than 15%	Device has been fully charged or not charging

GSM LED - GREEN

LED	Light shows a single flash rapidly every 3 seconds	Light shows a double flash rapidly every 3 seconds	Light shows a slow flash every 3 seconds	Light Solid (not flashing)
STATE	The device is connected to the GSM network	The device is registered to the GPRS network	The device is connecting to the GSM network	No SIM card is detected

GPS LED - BLUE

LED	Light shows a single flash rapidly every 3 seconds	Light shows a slow flash every 3 seconds (every 1 second ON and 3 seconds OFF)	Blue OFF (when device not charging)
STATE	The device has a GPS positioning fix	The device has NP GPS fix	The GPS chip is Sleeping


⑥ CONFIGURATION BY SMS

1. Set the Authorized Number

① Send SMS Command: **A1** or **A1**, phone number

Note: With no spaces in the text, case-insensitive.

- ❖ Using your mobile phone, send **A1** to the phone number of the device, it will reply: **Set mobile number 1 OK!**



To delete this number, you can send **A0** to the device.

NOTE: It is not mandatory for all three of the authorized numbers to be set, however a minimum of one must always be set.

② Send SMS Command: **B1** or **B1**, phone number (Example: B1,+447624xxxxxx)

- ❖ Using your mobile phone, example send **B1,+447624xxxxxx** to the phone number of the device. It will reply: **Set mobile number 2 OK!**
To delete this number, you can send **B0**

③ Send SMS Command: **C1** or **C1**, phone number (Example: C1,+447624xxxxxx)

- ❖ Using your mobile phone, example send **C1,+447624xxxxxx** to the phone number of the device. It will reply: **Set mobile number 3 OK!**
To delete this number, you can send **C0**

STARTING PEBBELL 2

⑦ ACTIVATING SOS “BUDDY” ALARM

Press and hold the SOS button for 3 seconds until the device vibrates, and then green light will start to flash rapidly to confirm the request. After that, an SOS Alarm “Help me” – SMS message with LOCATION COORDINATES – is sent to all authorized phone numbers and to the platform. It will also dial the 3 authorized numbers in sequence. If the device fails to connect to the first (A1) number, it will call the second one. In case the second (B1) number fails to be connected as well, the device will call to the third number (C1). If device fails to dial all 3 numbers, it will start dial the numbers again after 5 minutes. This will continue until one of the phones numbers answer the call.

- To end the call, press the SOS button

⑧ MAKING A PHONE CALL

To make a normal call, press and hold the side button for 3 seconds and you will hear a beep.

The green light will flash rapidly to confirm the request and then it will dial the THIRD (C1) number.

To end the call, press the SOS button



⑨ LOCATION REQUEST

1. Reply with coordinates and web link


Send SMS Command: **LOC**

The device will reply

"GPS Info! Time: xxxxx; Lat: xxxx; Lon: xxxx; Spd: xxxxx, Altitude:xxxx Bt: xxx and a link to google map:

maps.google.com/maps?q=48.148876,11.542431

By clicking on the link the location will be shown directly on Google Map on your mobile phone (Mobile phone needs to be connected to internet)

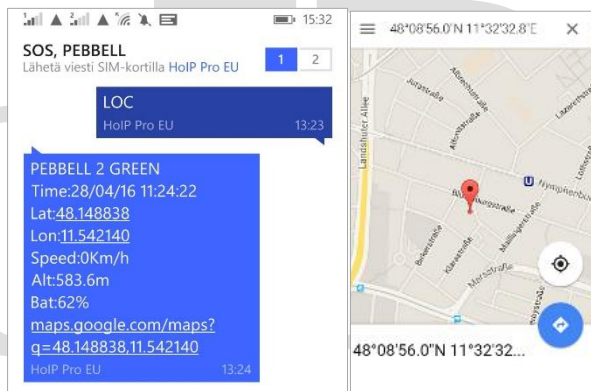

STARTING PEBBELL 2

1 - 2 - 3 STEPS SUMMARY TO GET STARTED

1. Charge your Pebbell 2 battery for 2-3 hours and switch power ON
2. Using your mobile phone, send A1 to the phone number of the device, it will reply: Set mobile number 1 OK!
3. PUSH the SOS "BUDDY" Button and receive SOS Call and "Help me" – SMS message with LOCATION COORDINATES

When and if you have more interest to get a clear understanding of all features consider reading Pebbell 2 Full User Guide – here a brief overview:

LOW BATTERY ALARM	PN LOCK YOUR DEVICE
GEO-FENCE ALARM	OVER-SPEED ALARM
MOVEMENT ALARM	MOTION ALARM
FALL DETECTION	LISTEN-IN
GPS LOST SIGNAL AND RECOVERY	POWER SAVING MODES
SIM CARD TARIFF	WARRANTY
LIVE WEB TRACKING Check from your Reseller if WEB - License included in your purchase package	SMARTPHONE MOBILE CLIENT (Web-license) <ul style="list-style-type: none">• Android ready• IOS and Windows under development

We wish you enjoyable moments with Pebbell 2

Recommended (01.05.2016) Pebbell PRO UK+ EU SIM Profile⁴⁵

Prices	SMS	Data¹	Voice²	Rental³
NET 0% VAT	£0,1000	£0,1200	£0,1200	£0,8333
Incl. 20% VAT	£0,1250	£0,1440	£0,1440	£1,0000

¹ Price per 1 Mb

² Price per 60 second call

³ Monthly Connectivity Rental Fee - Charged automatically at your PAYG account

⁴ Roaming SIM Profile UK Network Coverage - O2, T-Mobile, Orange and Vodafone.


⁵ Use your Pebbell freely also in over 30 European countries no extra Roaming charge – usage in Spain would cost same than in UK


- For normal user the average usage costs per month has been 83,3p (Monthly Line Rental) +1.50-3.00 GBP (SMS + Voice + Data)
- For normal user the average usage costs per month when using mainly Pebbell LIVE service is 83.3p (Monthly Line Rental) + Factory Setting LIVE – location update every 15 minutes so approx. 2900 locations per month cost 80p-1.00 GBP

STARTING PEBBELL 2

LINK your Pebbell NOW at <http://www.pebbell-gps.com/link-pebbell>

 For smooth services - Pebbell only works if it has positive user credit - your benefit to LINK your mobile number and email .

 Once you LINK your email and mobile number to your Pebbell Number you are able to:

 Receive automated Pebbell Low User Credit (Credit drops under 2 GBP) warnings by email and SMS.

 You will receive (email) monthly SIM Usage statements (PDF) of your Pebbell(s)

 You can check your Pebbell Credit Balance when ever just by sending SMS request

 You will receive updates of the manuals